

## AERMOD AIR DISPERSION MODELING AND HEALTH RISKS OF GAS AND OIL FUELED HEATING PLANT EMISSIONS

by

**Željko M. ĆIROVIĆ<sup>a</sup>, Mirjana R. ĆUJIĆ<sup>b</sup>, Mirjana B. RADENKOVIĆ<sup>b</sup>,  
Jelena R. OBRADOVIĆ<sup>c</sup>, and Antonije E. ONJIA<sup>c\*</sup>**

<sup>a</sup>Innovation Center of the Faculty of Technology and Metallurgy, Belgrade, Serbia

<sup>b</sup>Vinča Institute of Nuclear Sciences, National Institute of the Republic of Serbia,  
University of Belgrade, Belgrade, Serbia

<sup>c</sup>Faculty of Technology and Metallurgy, University of Belgrade, Belgrade, Serbia

Original scientific paper

<https://doi.org/10.2298/TSCI220214109C>

*A significant part of the population in Serbia relies on central heating systems during the winter months, with around fifty heating plants in operation across the country. Common fuels used in these plants primarily include fossil fuels such as fuel oil and natural gas. Combustion of some of these fuels leads to significant emissions of air pollutants. This study evaluates the impact on the air quality of the two heating boilers at the Valjevo city, Serbia, heating plant. Air emissions were measured separately for two heating boilers in the facility using standard reference methodology. The AERMOD air dispersion model was used to estimate the dispersion of various pollutants. A combination of topographical and meteorological data was used to set up a receptor grid exposed to air pollution within a 10 km radius around the heating plant. It was found that the resulting distribution and concentration gradient of pollutant gases and particles were less inclined towards the city center and instead spread eastwards into the surrounding villages. The health risk from the fuel oil boiler was shown to be significantly higher than that caused by the natural gas-fuelled boiler. Nevertheless, the calculated carcinogenic and non-carcinogenic health risks were within acceptable limits. However, further research is required to adequately assess the cumulative health risk generated by other surrounding emitters.*

Key words: AERMOD, hazard index, air emission, carcinogenic, stack, exposure

### Introduction

District heating systems are widely used during winter as an efficient means of generating and distributing heating energy. Depending on the number of households served in the corresponding urban area, these systems are usually powered by one or multiple heating plants. One big downside concerning district heating systems is their heavy reliance on fossil fuels at a time where CO<sub>2</sub> emission reduction is encouraged. These include natural gas, heating oil, coal, and more environment-friendly alternatives such as biomass or refuse. Another issue with district heating systems is their proximity to the urban areas they provide heating energy for.

---

\*Corresponding author, e-mail: onjia@tmf.bg.ac.rs

Studies have shown that their detrimental contribution to air and land pollution is significant [1]. Despite this, district heating has a net less harmful environmental impact than local heating solutions [2].

District heating plants in Serbia started operating about half a century ago. Currently, around fifty heating plants are operating across the country to accommodate the heating needs of the ever-increasing urban population of the country. Unfortunately, the centrally and often inefficiently planned city layouts and infrastructure during the latter half of the 20<sup>th</sup> century meant that many cities in the country were left with power and heating plants positioned alarmingly close to the respective city centers and residential areas. The Valjevo heating plant is not an exception to this.

A positive trend that has been present in the past fifty years in Europe and since the 21<sup>st</sup> century in Serbia is the transition from fuel oil-based heating plants and boilers to natural gas. The environmental footprint of combusted natural gas emissions is considered to be significantly lower than that of fuel oil. However, little research has been done to determine the environmental and health benefits of switching from oil to natural gas fuelling. In that regard, the Valjevo heating plant was an ideal testing ground for this study. Since 2019, the plant has been operating two heating boilers, one fuelled by fuel oil (mazut) and the other by natural gas. Even though coal is still used in some heating plants in Serbia and still remains a primary source of air pollution around the globe, it was omitted from this study as this heating plant does not use coal as a fuel.

The aim of this study is twofold. Firstly, based on the measured emission data, ground-level concentration maps of the various pollutants will be created, and health risk will be evaluated at certain chosen sampling points located in the densely populated city center. Secondly, and per the previous discussion, the impact on public health and air quality will be compared based on the fuel being used. Several studies were done using various air dispersion models and on-site measurements or estimated emission data [3, 4], though mainly evaluating industrial emitters [4-9] or power plants [3, 10-15], and some of them omitting health risk assessment altogether [16]. A recent work [17] deals with AERMOD modelled dispersion from natural gas and fuel oil emitters but with a smaller set of pollutants. Significant difference between this and similar studies in the same field of research is the combination of on-site measured data, air dispersion modelling, health risk assessment and comparative analysis between two fuel types. In this work, the emission rates of the individual pollutants were acquired with modern measurement devices at the heating plant. The subsequent concentration distribution was obtained with real meteorological and topological data through air dispersion modelling.


## Materials and methods

This study was executed in several steps, explained in the following subchapters. Firstly, familiarization with the site area, city layout, as well as the location of the power plant and its characteristics. Afterwards, on-site data had to be obtained by measuring the emission from the respective stacks using appropriate methods and equipment. Based on the data collected, emission rates of multiple pollutants were extrapolated based on EPA emission factors for the fuels that are used at the two stacks. By comparing these emission rates with the reference concentration (RfC) and inhalation unit risk (IUR) values obtained from the Agency for Toxic Substances and Disease Registry (ATSDR) and the Integrated Risk Information System (IRIS) on a per-pollutant basis, sulphur dioxide, arsenic, cadmium, and formaldehyde concentrations were determined to have the greatest impact on the health and cancer risk caused by

emissions from gas and fuel oil emissions. The emission rates of these selected pollutants were used as input for the AERMOD dispersion model and concentration maps were obtained for the impacted region. Lastly, a methodology for obtaining the health and cancer risks based on the acquired ground concentrations was applied.

### Description of the studied area and heating plant

Valjevo is the second-largest city in western Serbia, with an urban population of about 60000. It is the administrative center of the Kolubara district. It is located, fig. 1, on the estuary of the Kolubara River, which is formed by the Jablanica, Obnica, and Gradac rivers. This creates a valley suitable for urban development amidst extensive mountain ranges, which occupy the city's surroundings. The Medvednik, Jablanik, Povlen, Maljen, and Suvobor mountains surround the city. This city has a mild Mediterranean climate and average rainfall amounts throughout the year. Owing to the stark contrast between the river valley and the surrounding mountains, the city experiences relatively strong winds coming from the east.

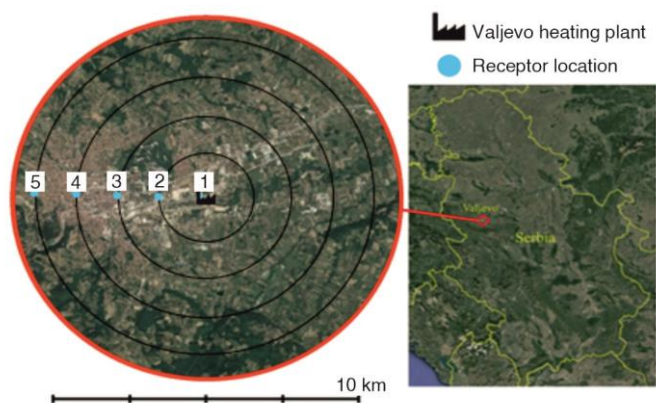

**Figure 1. Valjevo heating plant, receptor locations of interest and the surrounding area**

The Valjevo heating plant is the largest in western Serbia, with a total capacity of 80 MW of heating energy. It is located in the eastern part of the city. It has two major heating boilers in addition to two 0.29 MW local boilers, which are used for the purposes of the heating plant. The heating gas-fuelled boiler has a heating capacity of 30 MW, a working temperature of 107 °C and a working pressure of 9.9 bar. A burner powers it with a variable power that goes from 4 MW up to 30 MW. The fuel gas-fuelled boiler has a capacity of 50 MW and a working temperature of 130 °C. Two burners power it with a power of 29 MW. Both boilers operate based on the same principles - fuel is being burned in the boiler stokehole. The generated heat increases the temperature of the water, which is then distributed across the heating system network. Any flue gases are emitted directly into the environment via two 50 m stacks. The surrounding area is sparsely populated to the east, but a dense city centre is just under 3 km away from the heating plant.

### Flue gas measurement

On-site flue gas measurements are performed by inserting the sampling probe into the cavity of the emission stack from outside through specially designed sampling ports. In this case, flue gas parameters were thus measured at the height of 20 m from the base of both stacks. The stack diameters of the natural gas and fuel oil boilers at the access points were 1.4 m and 1.6 m. Three measurements of the concentrations and flow rates of the pollutants were taken across five hours simultaneously. During the measurement, the boilers were operating at their default operation modes. Automatic particle and gas analysers were employed for the measurements, and the concentrations were obtained using methods described in tab. 1. Similar methods were employed in another paper dealing with the on-site measurement of a heating


plant located in Zrenjanin, Serbia [18]. The parameters which were measured include flue gas temperature and flow as well as the concentrations of total particulate matter (TPM), CO, NO<sub>2</sub>, and SO<sub>2</sub>.

**Table 1. Pollutants, methods, measurement devices and principles**

Pollutant/Parameter	Methods	Method reference	Devices	Measurement principle
Velocity/flow	ISO 10780	[19]	TCR Tecora Isostack G4	Pitot tubes
O <sub>2</sub>	EN 14789	[20]	Horiba PG350E	Paramagnetic
CO	EN 15058	[21]	Horiba PG350E	Non-dispersive infrared
NO <sub>x</sub>	EN 14792	[22]	Horiba PG350E	Chemiluminescence
SO <sub>2</sub>	ISO 7935	[23]	Horiba PG350E	Non-dispersive infrared
TPM	ISO 9096	[24]	TCR Tecora Isostack G4	Isokinetic sampling

### Air dispersion modelling

The EPA recommended AERMOD model was used to model the pollutant dispersion and obtain the ground level concentrations [4-6, 15, 25, 26] of SO<sub>2</sub>, arsenic, cadmium, and formaldehyde. These specific contaminants were chosen because it was determined that they have the greatest impact on the health risk indices explained later. The AERMOD is a steady-state plume model, which simulates air dispersion while considering various factors such as planetary boundary-layer turbulence, topography, and surface characteristics of various types of terrain. Figure 2 shows the flow chart for the various input pathways of the AERMOD dispersion model. For the assessment of the ground-level concentrations, five years of meteorological data were obtained from the local weather station. This data includes hourly records of the local temperatures, wind speed and direction, humidity, atmospheric pressure, precipitation, etc., tab. 2. The raw values were pre-processed in the AERMET pre-processor, and usable surface and profile meteorological data were generated.

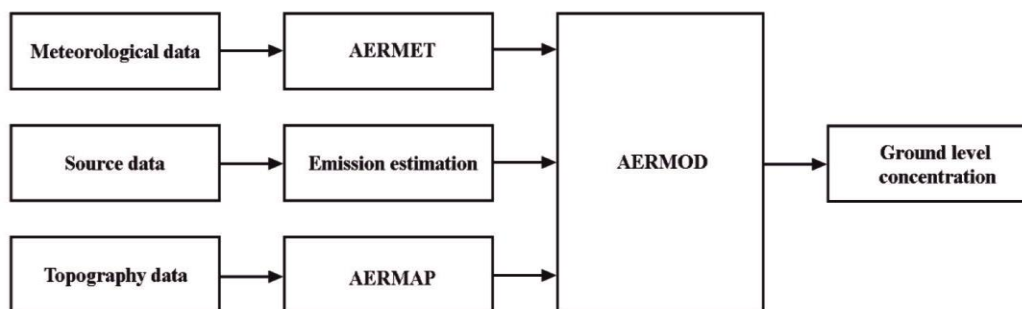

**Figure 2. Flow chart showing the AERMOD workflow with the respective input and output pathways**

**Table 2. Valjevo meteorological parameters**

	Temperature [°C]	Wind speed [m/s]	Wind direction [°]	Humidity [%]	Pressure [kPa]	Precipitation [mm]
Min	-18.8	0	-	13	986	0
Max	39.9	68.1	-	100	1049	278.9
Average	11.5	8.4	207.7	74.8	1021.7	0.14

A total of 40000 ground-level receptors were set-up, spanning an area of about 100 km<sup>2</sup> around the city of Valjevo. These are used for the generation of ground-level concentration

maps for all of the pollutants. The area was carefully chosen in order to encompass as much of the inhabited area as possible.

In addition to meteorological data, AERMOD also requires topographical terrain data. For this study, SRTM3 global map data with an average resolution of 90 meters was used. They were pre-processed through the AERMAP pre-processor, and the height data was applied to the whole receptor grid.

Finally, the measured emission rates were used to estimate the spreading of pollutants. The EPA AP-42 compilation of air emissions factors was used for obtaining the relative emission factors for a number of pollutants [4]. Estimates of the emission factors:

$$ER_n = \frac{EF_n}{EF_{NO_x}} ER_{NO_x} \quad (1)$$

where  $ER_n$  represents the emission rate of the pollutant,  $ER_{NO_x}$  is the emission rate of  $NO_x$ ,  $EF_n$  is the emission factor corresponding to the pollutant while  $EF_{NO_x}$  is the emission factor of  $NO_x$  for the given fuel and boiler type. They are based on the on-site acquired  $NO_x$  emission rates as these measurements proved to be most consistent across both heating boilers and AP-42 lists  $NO_x$  as having a type "A" emission factor rating in our particular case, meaning that it's very reliable for use in calculations. In this way, emission rates of arsenic, cadmium and formaldehyde were obtained, which were essential to assess the health risk.

The data generated by the various input pathways and pre-processors allows AERMOD to be run. Three distinct emission scenarios were set-up: emission by each of the boilers separately, as well as the combined emission of both of the boilers. In each of these scenarios, the emission of TPM,  $SO_2$ , arsenic, cadmium and formaldehyde were modelled with both a 1-hour averaging period and an averaging period spanning the whole time period of five years.

### *Health risk assessment*

The assessment of the health risk caused by the heating plant is based upon the obtained ground level concentrations of the pollutants, out of which health risk indices are going to be derived – the health index and total cancer risk. In respect to the modeled data, three distinct scenarios were evaluated and the mentioned indices were calculated separately for each of the scenarios. One in which only the fuel oil powered boiler emissions were taken into account, one in which only the gas powered boiler emissions were taken into account and one in which the cumulative emissions were assessed. This would give a good basis for a general health risk assessment and enough data for a comparative analysis between the two fuel sources.

Apart from the measured inorganic gases such as  $SO_2$  and CO, the suspended particulate matter is composed of a wide variety of other elements and compounds. Among these, one can find heavy metals [13, 27], water-soluble substances [28] as well as incompletely combusted hydrocarbons [7, 29]. These are significant contributors to the generated environmental and health risk from heating plants and other combustion-based sources. They can have a noticeable impact on mortality [30] and also increase the carcinogenic risk for the local population.

Five equidistant receptor locations were setup for the purposes of the health risk assessment. The first one is 125 m away from the plant itself, and the remaining four points are 1 km away from each other away from the plant. It is to be noted that all of them are located in populated parts of the city but with an increasing distance from the heating plant. The  $R_pC$

values were obtained from a combination of sources, primarily from the IRIS [31], and the ATSDR [32].

Individual pollutant Hazard Quotients were calculated through the comparison of the estimated exposure concentrations and the respective RfC. The hazard index represents the sum of all hazard quotients, [25]:

$$HQ_n = \frac{EC_n}{R_f C_n} \quad (2)$$

$$HI = HQ_1 + HQ_2 + \dots + HQ_n \quad (3)$$

where  $EC_n$  is the exposure concentration of pollutant  $n$ ,  $R_f C_n$  is its reference concentration,  $HQ_n$  is its hazard quotient, and  $HI$  represents the hazard index. Health index and health quotient values above and around 1 mean that the health of the affected population is significantly impacted by the generated pollution.

Similarly, the cancer risk was evaluated by summing up the individual cancer risk contributions of the individual elements. The individual contributions were obtained as a product of the IUR and the exposure concentrations of the various pollutants, [25]:

$$CR_n = EC_n \times IUR_n \quad (4)$$

$$CR = CR_1 + CR_2 + \dots + CR_n \quad (5)$$

where  $EC_n$  is the exposure concentration of pollutant  $n$ ,  $IUR_n$  is the inhalation unit risk,  $CR_n$  is the individual cancer risk, and  $CR$  is the total cancer risk. Cancer risk values above the  $1 \times 10^{-6}$  threshold mean that the carcinogenic potential of the inhaled pollutants can be considered significant.

It is to be noted that both the hazard index and the cancer risk are cumulative values dependent on the number of pollutants that were considered for the health risk assessment. Thus it is difficult to calculate an all-encompassing value without considering all possible pollutants. In this study,  $\text{NO}_x$ , arsenic, cadmium, and formaldehyde were found to have the most significant impact and are thus the pollutants modeled and factored into the calculations.

## Results and discussion

### *Emission data of the studied heating plant*

Both stacks were monitored during the heating season while at full capacity. Following the specified methods, concentrations of the various pollutants in flue gas were obtained. Together with the measured exhaust gas flow rates and the stack diameter, their emission rates were calculated. It is to be noted that the measured concentrations of TPM and  $\text{SO}_2$  emitted by the natural gas-powered boiler were lower than the method detection limit. Thus, it was estimated that their concentrations were approximately equal to half the limit of detection. The emission rates for the natural gas-powered boiler were calculated to be 115 g/h and 2499 g/h for CO and  $\text{NO}_x$ , respectively. For the fuel oil-powered boiler, the emission rates are as follows: 507 g/h for CO, 8449 g/h for  $\text{NO}_x$ , 23049 g/h for  $\text{SO}_2$  and 6253 g/h for TPM.

The obtained emission rates are in line with existing studies that focus on air dispersion modelling from thermal plants in particular [14, 15]. However, the measured values are slightly lower than in the mentioned studies because the Valjevo heating boilers have a significantly lower heating capacity.


Based on the emission data obtained on site, and based on the emission factors mentioned in section *Air dispersion modelling*, emission rates were determined for a wide range of pollutants. Out of these, As, Cd, HCHO were found to have the most significant impact on the air quality, tab. 3, and, accordingly, on the non-cancer and cancer risks involved.

**Table 3. Emission rates of main pollutants (g/h)**

Pollutant	Gas boiler	Fuel oil boiler
SO <sub>2</sub>	107	23049
As	0.0196	0.0720
Cd	0.00357	0.24
HCHO	1.34	5.97


*Evaluation of the modelling results*

The obtained meteorological, topological, and emission rate data were used as input parameters for the air dispersion model. The resulting wind rose generated by AERMET shows that the most severe winds were coming from the western direction, fig. 3.

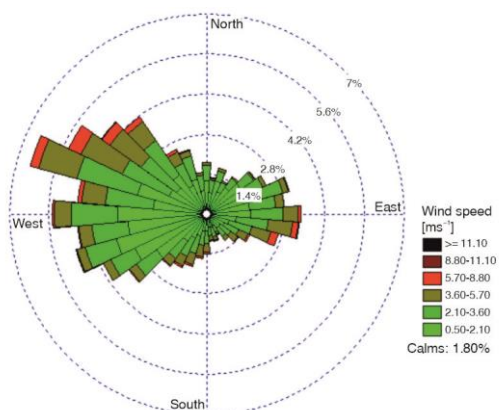

**Figure 3. Valjevo wind rose**

The obtained ground-level pollutant distributions were in accordance with this. Figure 4 shows the ground level distribution of the emitted particulate matter, and the dispersion maps of the other pollutants have a similar pattern. The relatively tall stack heights of 50 m combined with the strong west winds ensure that the city's urban part is spared from the brunt of the polluting fumes. The area with the highest pollution is next to the power plant itself, which is located in the sparsely populated industrial area in the eastern part of the city. The moderately polluted area reaches the west half of the city centre due to the occasional east winds and

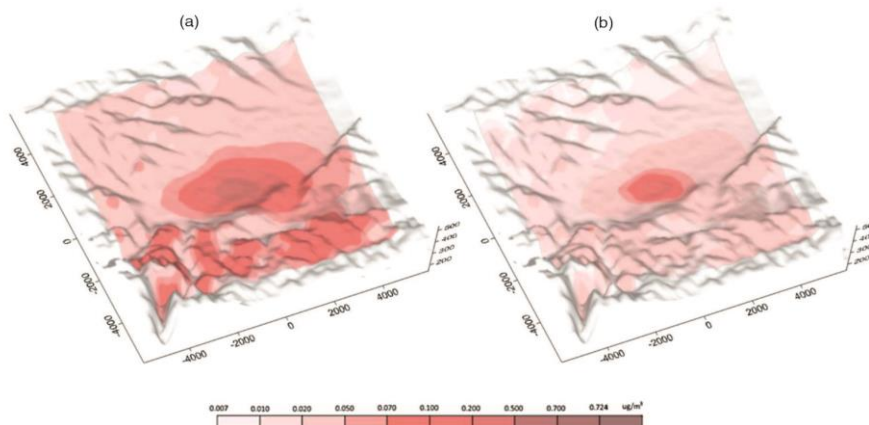

**Figure 4. The TPM ground level distribution emitted by (a) fuel oil-fuelled boiler and (b) natural gas-fuelled boiler**

also encompasses the more sparsely populated *Novo Naselje* eastern part of the city. About two-thirds of the total particles are carried in the southeastern direction towards the village of Beloševac and the mountainous region on the southern edge of the city.

Due to extremely low emission rates of SO<sub>2</sub>, the natural gas boiler emitted ground-level pollution is almost non-existent compared to the fuel oil boiler concentrations. Similar patterns can be observed for the other pollutants, signifying the significantly lower pollution footprint generated by the natural gas-fuelled boiler. The resulting health risks were proportionally more minor, which will be further explained in the following sections of this study. Compared to similar studies featuring thermal plants [14, 15], the observed pollution levels are slightly smaller, again owing to the smaller heating capacity of the Valjevo heating plant. At all receptor locations, estimated sulphur dioxide ground-level concentrations attributed to the emission from this plant never exceeded 0.254 µg/m<sup>3</sup>, which is still below the limit value set by national regulations [33, 34]. The estimated ground-level concentrations of sulphur dioxide emitted by the natural gas boiler were consistently around 200 times lower than that of the fuel oil boiler. Even considering the smaller heating capacity, this shows a remarkable reduction in pollutant emissions and concentrations.

Results obtained for the remaining pollutants (arsenic, cadmium, formaldehyde) showed similar trends. Due to their emitted concentrations being extrapolated via respective emission factors and AERMOD using similar modelling equations for non-standard pollutants, the ground level concentration distributions were similar. Again, most of the pollution was carried eastward onto the suburbs and industrial zone of the city. The ground-level concentrations of these pollutants were far below the values set by regulatory guidelines.

#### *Non-carcinogenic health risk*

In accordance with the all-around lower pollutant concentrations emitted by the natural gas-fuelled boiler, the health risk is equally lower, tab. 4. The four most significant contributors to the hazard index were determined to be arsenic, cadmium, formaldehyde, and SO<sub>2</sub>, with SO<sub>2</sub> being the main contributing pollutant for the fuel oil boiler and cadmium being the main contributing pollutant for the natural gas boiler. The resulting calculated HQ show no significant long-term health risk in a diameter of 10 km around the city, as all the hazard indices are considerably smaller than 1. However, contributions from other emitters in the city could cumulatively cause concern. In addition, the transition from fuel oil being the only energy source to natural gas has had a considerable impact on health risk. Hazard indices tend to be 1-2 orders of magnitude lower when natural gas is used as the primary fuel.


**Table 4. Hazard index values at the receptor locations**

	1	2	3
Fuel oil	$9.34 \times 10^{-3}$	$8.00 \times 10^{-3}$	$3.57 \times 10^{-3}$
Natural gas	$1.04 \times 10^{-4}$	$8.36 \times 10^{-5}$	$4.02 \times 10^{-5}$

The individual pollutant contributions to the hazard index on a per-boiler basis are shown in fig. 5.

In comparison to similar studies [12], the observed health risk was comparable but slightly lower because the power plant has a slightly smaller heating capacity. Generally, the health risk estimates surrounding heating plants are significantly smaller than those generated by coal power plants [25] though still not negligible.



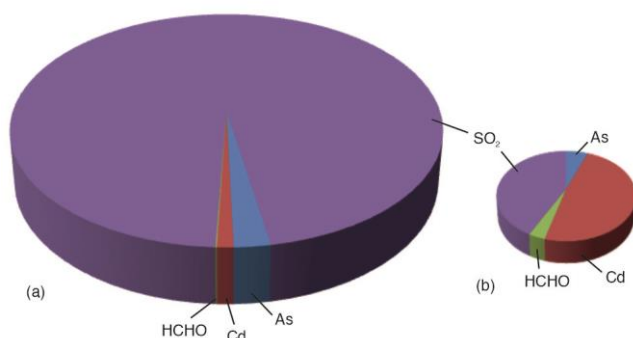

**Figure 5. Hazard index contributions of the various pollutants emitted by; (a) fuel oil boiler and (b) natural gas boiler**

**Carcinogenic health risk**

Arsenic, cadmium, and formaldehyde were found to be the pollutants that have the greatest cancer risk contributions. The SO<sub>2</sub> does not have an inhalation unit risk and thus was not evaluated. Arsenic is the pollutant with the largest cancer risk contribution, followed by cadmium and formaldehyde. The total cancer risk for the pollutants considered is significantly smaller than the 1×10<sup>-6</sup> threshold, tab. 5. Similar to

the hazard quotient, the risk produced by the natural gas boiler is one order of magnitude lower than that produced by the fuel oil boiler. Therefore, it can be concluded that the area around the heating plant has a low cancer risk when only the contribution from the plant itself is considered. A more comprehensive study is required to assess the cumulative influence of other polluting emitters in the Valjevo industrial zone. In addition, other carcinogens not covered by this study would also have to be taken into account.

**Table 4. Cancer risk values at the receptor locations**

	1	2	3	4	5
Fuel oil	$9.34 \times 10^{-3}$	$8.00 \times 10^{-3}$	$3.57 \times 10^{-3}$	$6.04 \times 10^{-9}$	$4.50 \times 10^{-9}$
Natural gas	$1.04 \times 10^{-4}$	$8.36 \times 10^{-5}$	$4.02 \times 10^{-5}$	$4.60 \times 10^{-10}$	$3.39 \times 10^{-10}$

Similar to the non-carcinogenic health risk assessment results provided previously and similar to results reported by Shaikh *et al.* [15], the carcinogenic health risks obtained were far below any level that would cause concern.

**Conclusion**

Based on the obtained concentration maps, and as a result of the local meteorology and observations of the wind rose, it can be said that due to strong east and northeast winds, the bulk of the pollutants is carried away from the populated city centre. Still, there remains a non-negligible amount of pollution around the thermal plant. However, only 375 m away (based on the data from receptor Point 3), the health risk decays by around 50%. Risk assessments reveal with high certainty that natural gas-fuelled boilers present a significantly lower risk to the human health of the population exposed to their emissions than fuel oil boilers. However, it also needs to be pointed out that the obtained hazard risks by no means represent a finite hazard risk that the population in Valjevo is subjected to, neither by the emissions from the heating plant nor in general. Various other pollutants would be necessary to consider for getting a more accurate understanding of the actual health risk in the investigated area. In addition, other emitters, which are present in the industrial zone of Valjevo, would also have to be considered. Nevertheless, this study provides valuable insight into the relative health risk generated by the studied heating plant. Furthermore, it points out the significance of switching

from heavier fuels such as fuel oil to natural gas in pursuit of a greener and more environment-friendly solution to the heating demands of a mid-sized city. Finally, it is of note that the air pollution and health risk caused by the thermal plant would be cut by almost a factor of ten if the fuel oil boiler was to be replaced with a natural gas powered one.

### Acknowledgment

This research was supported by the Science Fund of the Republic of Serbia (Grant No. 7743343 SIW4SE).

### References

- [1] Todorović, M., *et al.*, Characterization of PM<sub>2.5</sub> Sources in a Belgrade Suburban Area: A Multi-Scale Receptor-Oriented Approach, *Environ. Sci. Pollut. Res.*, 27 (2020), July, pp. 1-14
- [2] Lund, H., *et al.*, The Role of District Heating in Future Renewable Energy Systems, *Energy*, 35 (2010), 3, pp. 1381-1390
- [3] Kozić, M., *et al.*, A Numerical Study for the Assessment of Pollutant Dispersion from Kostolac B Power Plant to Viminacium for Different Atmospheric Conditions, *Thermal Science*, 19 (2013), 2, pp. 425-434
- [4] Shaikh, K., *et al.*, Health Risk Assessment of Emissions from Brick Kilns in Tando Hyder, Sindh, Pakistan Using the AERMOD Dispersion Model, *SN Appl. Sci.*, 2 (2020), 7, pp. 1-11
- [5] Seangkiatiyuth, K., *et al.*, Application of the AERMOD Modeling System for Environmental Impact Assessment of NO<sub>2</sub> Emissions from a Cement Complex, *J. Environ. Sci.*, 23 (2011), 6, pp. 931-940
- [6] Kakosimos, K. E., *et al.*, Application and Evaluation of AERMOD on the Assessment of Particulate Matter Pollution Caused by Industrial Activities in the Greater Thessaloniki Area, *Environ. Technol.*, 32 (2011), 6, pp. 593-608
- [7] Cvetković, A., *et al.*, Concentration and Source Identification of Polycyclic Aromatic Hydrocarbons in the Metropolitan Area of Belgrade, Serbia, *Atmos. Environ.*, 112 (2015), Apr., pp. 335-343
- [8] Abdel-Gawad, A. I., *et al.*, Assessment of Emissions from Cement Plants Using AERMOD Modeling, *Appl. Environ. Res.*, 44 (2022), 1, pp. 10-27
- [9] Subhanullah, M., *et al.*, Assessment and Impacts of Air Pollution from Brick Kilns on Public Health in Northern Pakistan, *Atmosphere (Basel)*, 13 (2022), 8, 1231
- [10] Kanevce, G., Kanevce, L., Dispersion Modeling for Regulatory Applications, *Thermal Science*, 10 (2006), 2, pp. 141-154
- [11] Lopez, M. T., *et al.*, Health Impacts from Power Plant Emissions in Mexico, *Atmos. Environ.*, 39 (2005), 7, pp. 1199-1209
- [12] Vujić, *et al.*, Air Quality Monitoring and Modeling near Coal Fired Power Plant, *Thermal Science*, 23 (2019), 6B, pp. 4055-4065
- [13] Čujić, M., *et al.*, Environmental Assessment of Heavy Metals around the Largest Coal Fired Power Plant in Serbia, *CATENA*, 139 (2016), Apr., pp. 44-52
- [14] Ali, M., Athar, M., Dispersion Modeling of Noxious Pollutants from Thermal Power Plants, *Turkish J. Eng. Environ. Sci.*, 34 (2010), 2
- [15] Shaikh, K., *et al.*, Health Risk Assessment for Emissions from Jamshoro Thermal Power Station Using AERMOD Dispersion Model, *J. Ind. Pollut. Control*, 34 (2018), 2, pp. 2142-2151
- [16] Tran, Q. A., *et al.*, Simulation of Thermal Power Plant Source Contribution to Ambient Air Concentration in Cam Pha City, Quang Ninh Province Using AERMOD Dispersion Model, *J. Min. Earth Sci.*, 63 (2022), 3, pp. 35-42
- [17] Hesami Arani, M., *et al.*, Dispersion of NO<sub>2</sub> and SO<sub>2</sub> Pollutants in the Rolling Industry with AERMOD Model: A Case Study to Assess Human Health Risk, *J. Environ. Heal. Sci. Eng.*, 19 (2021), 2, pp. 1287-1298
- [18] Nakomčić-Smaragdakis, B., *et al.*, Data Analysis of the Flue Gas Emissions in the Thermal-Power Plant Firing Fuel Oil and Natural Gas, *Int. J. Environ. Sci. Technol.*, 11 (2014), 2, pp. 269-280
- [19] \*\*\*, ISO 10780. Stationary source emissions - Measurement of velocity and volume flowrate of gas streams in ducts. ISO, 1994.
- [20] \*\*\*, EN 14789. Stationary source emissions - Determination of volume concentration of oxygen - Standard reference method: Paramagnetism. CEN, 2017

- [21] \*\*\*, EN 15058. Stationary source emissions - Determination of the mass concentration of carbon monoxide - Standard reference method: non-dispersive infrared spectrometry. CEN, 2017
- [22] \*\*\*, EN 14792. Stationary source emissions - Determination of mass concentration of nitrogen oxides - Standard reference method: chemiluminescence. CEN, 2017
- [23] \*\*\*, ISO 7935. Stationary source emissions - Determination of the mass concentration of sulfur dioxide - Performance characteristics of automated measuring methods. ISO, 1992
- [24] \*\*\*, ISO 9096. Stationary source emissions - Manual determination of mass concentration of particulate matter. ISO, 2017.
- [25] Mokhtar, M. M., *et al.*, Health Risk Assessment of Emissions from a Coal-Fired Power Plant Using AERMOD Modelling, *Process Saf. Environ. Prot.*, 92 (2014), 5, pp. 476-485
- [26] Nikezić, D. P., *et al.*, Modeling Air Concentration of Fly Ash in Belgrade, Emitted from Thermal Power Plants TNTA and TNTB, *Process Saf. Environ. Prot.*, 106 (2017), Feb., pp. 274-283
- [27] Mijić, Z., *et al.*, Seasonal Variability and Source Apportionment of Metals in the Atmospheric Deposition in Belgrade, *Atmos. Environ.*, 44 (2010), 30, pp. 3630-3637
- [28] Todorović, Ž. N., *et al.*, Ambient Air Particles: The Use of Ion Chromatography and Multivariate Techniques in the Analysis of Water-Soluble Substances, *J. Serbian Chem. Soc.*, 86 (2021), 7-8, pp. 753-766
- [29] Jovanović, M. V., *et al.*, Comparison of Fine Particulate Matter Level, Chemical Content and Oxidative Potential Derived from Two Dissimilar Urban Environments., *Sci. Total Environ.*, 708 (2020), 135209
- [30] Todorović, M., *et al.*, Evaluation of Mortality Attributed to Air Pollution in the Three Most Populated Cities in Serbia, *Int. J. Environ. Sci. Technol.*, 16 (2019), Apr., pp. 1-12
- [31] \*\*\*, Integrated Risk Information System, <https://www.epa.gov/iris>
- [32] \*\*\*, Agency for Toxic Substances and Disease Registry, <https://www.atsdr.cdc.gov/>
- [33] \*\*\*, Regulation on Limit Values of Emissions of Pollutants Into the Air from Combustion Plants, Official Gazette of the RS, 6/2016, 67/2021
- [34] \*\*\*, Regulation on Conditions for Monitoring and Air Quality Requirements, Official Gazette of the RS, 11/2010, 75/2010, 63/2013